


HM0 cylinder Ø60/40

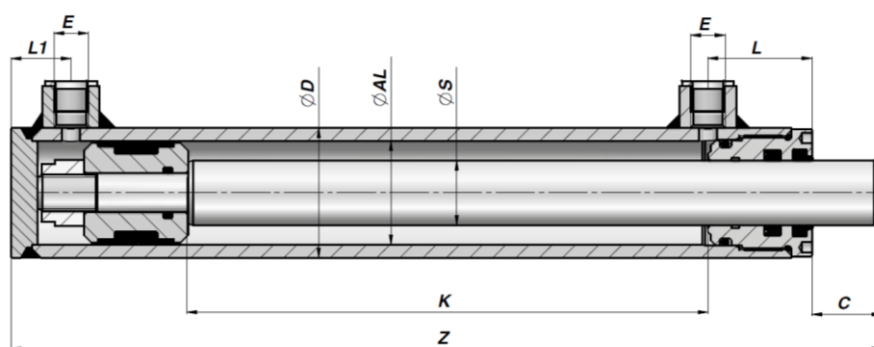

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdsdruk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 70 ØAL 60 ØS 40							
HM03400200	200	360	7,25	3/8"	50	30	23
HM03400250	250	410	8,14				
HM03400300	300	460	9,03				
HM03400350	350	510	9,90				
HM03400400	400	560	10,79				
HM03400450	450	610	11,64				
HM03400500	500	660	12,52				
HM03400550	550	710	13,45				
HM03400600	600	760	14,30				
HM03400800	800	960	17,82				
HM03401000	1000	1160	21,40				