


HM0 cylinder Ø63/40

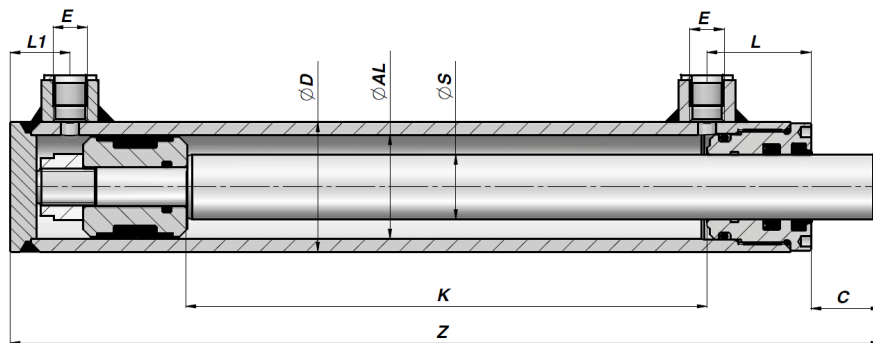

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25 °C - +80 °C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 73 ØAL 63 ØS 40							
HM0063400200	200	360	7,60	3/8"	50	30	23
HM0063400250	250	410	8,50				
HM0063400300	300	460	9,40				
HM0063400350	350	510	10,30				
HM0063400400	400	560	11,20				
HM0063400450	450	610	12,10				
HM0063400500	500	660	13,00				
HM0063400550	550	710	13,90				
HM0063400600	600	760	14,80				
HM0063400800	800	960	18,50				
HM0063401000	1000	1160	22,10				