


HM0 cylinder Ø70/35

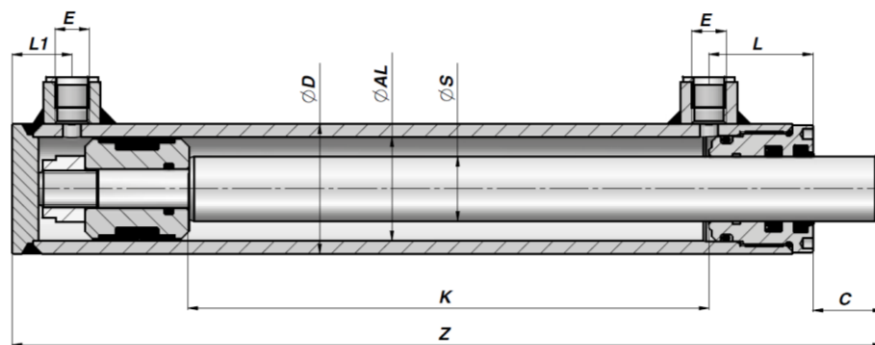

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 80 ØAL 70 ØS 35							
HM04350100	100	260	6,09	3/8"	50	33	23
HM04350150	150	310	6,95				
HM04350200	200	360	7,74				
HM04350250	250	410	8,60				
HM04350300	300	460	9,40				
HM04350350	350	510	10,26				
HM04350400	400	560	11,00				
HM04350450	450	610	11,88				
HM04350500	500	660	12,60				
HM04350550	550	710	13,66				
HM04350600	600	760	14,20				
HM04350800	800	960	17,56				
HM04351000	1000	1160	21,26				