


HM0 cylinder Ø70/40

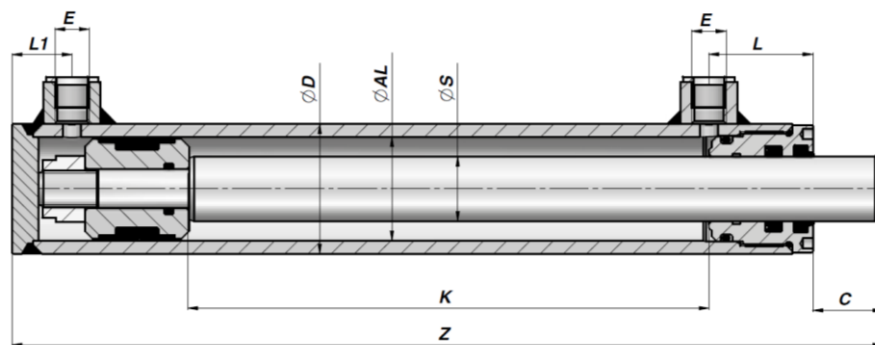

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 80 ØAL 70 ØS 40							
HM04400200	200	360	8,28	3/8"	50	33	23
HM04400250	250	410	9,26				
HM04400300	300	460	10,24				
HM04400350	350	510	11,20				
HM04400400	400	560	12,80				
HM04400450	450	610	13,11				
HM04400500	500	660	14,01				
HM04400550	550	710	15,10				
HM04400600	600	760	15,99				
HM04400800	800	960	19,73				
HM04401000	1000	1160	23,51				