


HM0 cylinder Ø80/40

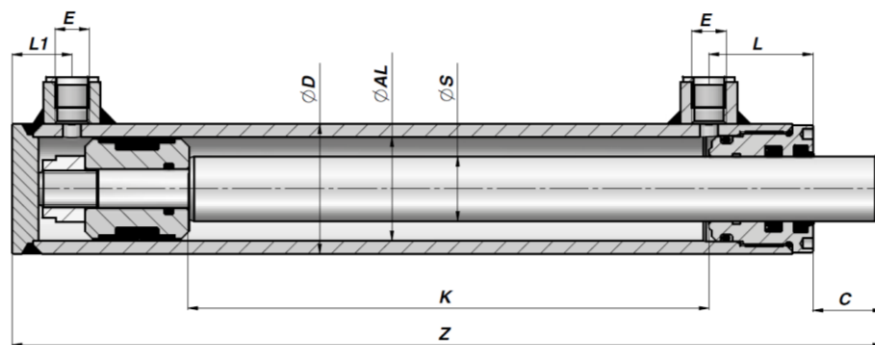

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 92 ØAL 80 ØS 40							
HM05400200	200	380	11,08	1/2"	60	35	25
HM05400250	250	430	12,22				
HM05400300	300	480	13,35				
HM05400400	400	580	15,56				
HM05400500	500	680	17,77				
HM05400600	600	780	19,98				
HM05400800	800	980	24,50				
HM05401000	1000	1180	28,92				