


Hydra-Comp

HM0 cylinder Ø120/70

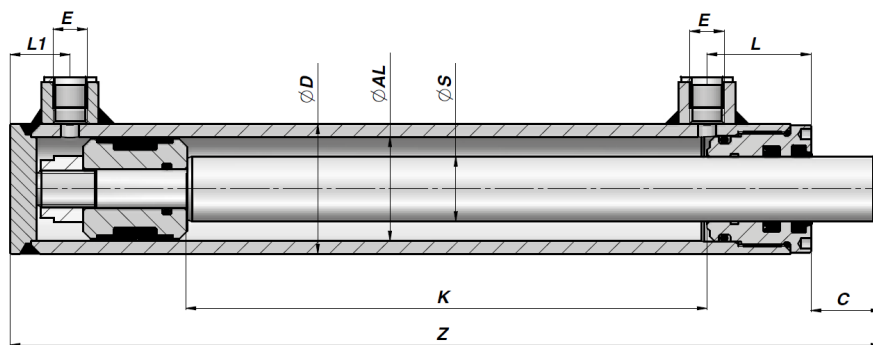

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C	AL	D	S
ØD 140 ØAL 120 ØS 70										
7073NUCH	300	515	41	1/2"	82	50	23	120	140	70
7074NUCH	400	615	47							
7075NUCH	500	715	53							
7076NUCH	600	815	59							
7078NUCH	800	1015	72							
7071NUCH	1000	1215	84							

www.hydra-comp.com

Bjørnevej 30 • DK-7800 Skive • Phone +45 96694080 • Fax +45 96694081 • mail@hydra-comp.dk