


Hydra-Comp

HFR2S cylinder Ø40/25

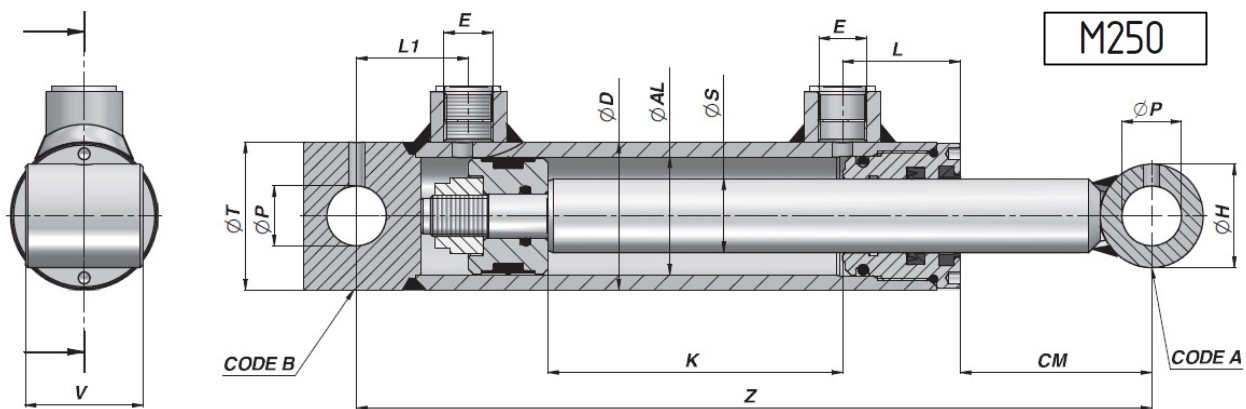

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	CM	ØP	ØH	V	ØT
ØD 50 ØAL 40 ØS 25											
HFR2S0400250100	100	270	3,00	3/8"	40	38	65	20,25	35	40	50
HFR2S0400250150	150	320	3,40								
HFR2S0400250200	200	370	3,90								
HFR2S0400250250	250	420	4,40								
HFR2S0400250300	300	470	4,80								
HFR2S0400250400	400	570	5,80								
HFR2S0400250500	500	670	6,70								
HFR2S0400250600	600	770	7,60								
HFR2S0400250700	700	870	8,60								
HFR2S0400250800	800	970	9,50								

www.hydra-comp.com