


HFR2S cylinder Ø50/30

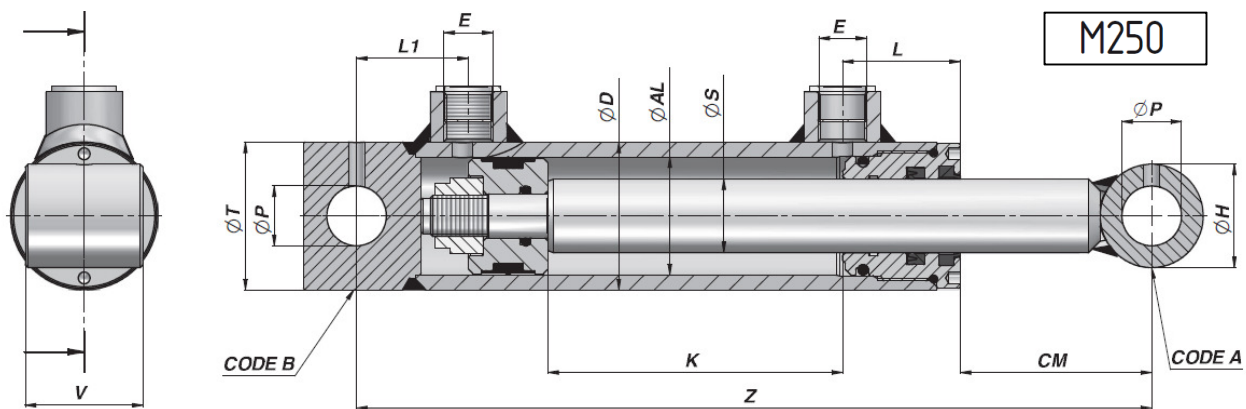

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045 with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	CM	ØP	ØH	V	ØT
ØD 60 ØAL 50 ØS 30											
HFR2S0500300100	100	300	4,40	3/8"	43	42	85	25,25	40	45	60
HFR2S0500300150	150	350	5,00								
HFR2S0500300200	200	400	5,60								
HFR2S0500300250	250	450	6,20								
HFR2S0500300300	300	500	6,90								
HFR2S0500300400	400	600	8,10								
HFR2S0500300500	500	700	9,30								
HFR2S0500300600	600	800	10,50								
HFR2S0500300700	700	900	11,80								
HFR2S0500300800	800	1000	13,00								
HFR2S0500300900	900	1100	14,20								
HFR2S0500301000	1000	1200	15,50								