


HFR2S cylinder Ø60/30

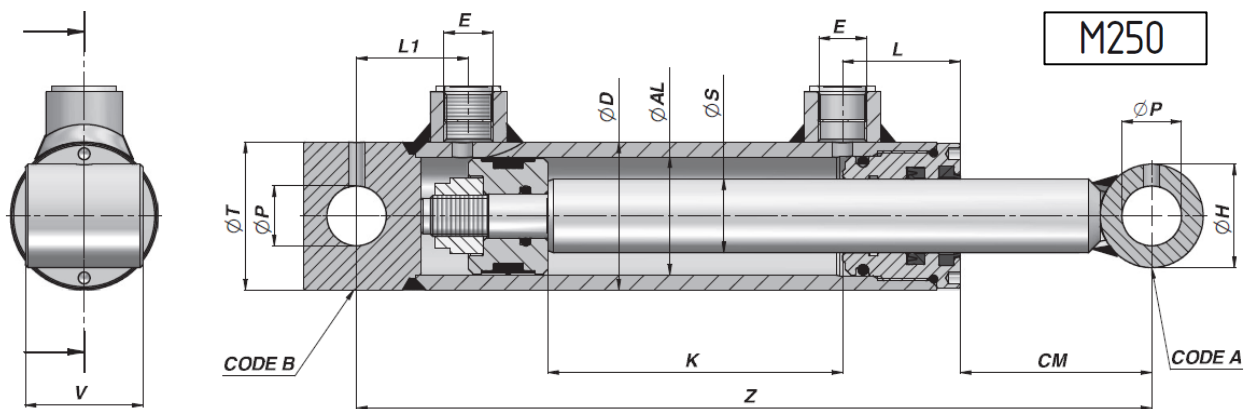

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	CM	ØP	ØH	V	ØT	Code A	Code B	Codice Code Bestell-Nr.	K	Z	kg
ØD 70 ØAL 60 ØS 30																	
HFR2S0600300100	100	300	5,60														
HFR2S0600300150	150	350	6,30														
HFR2S0600300200	200	400	7,00														
HFR2S0600300250	250	450	7,70														
HFR2S0600300300	300	500	8,30														
HFR2S0600300350	350	550	9,00														
HFR2S0600300400	400	600	9,70														
HFR2S0600300450	450	650	10,40														
HFR2S0600300500	500	700	11,00														
HFR2S0600300600	600	800	12,40														
HFR2S0600300700	700	900	13,70														