


HFR2S cylinder Ø60/35

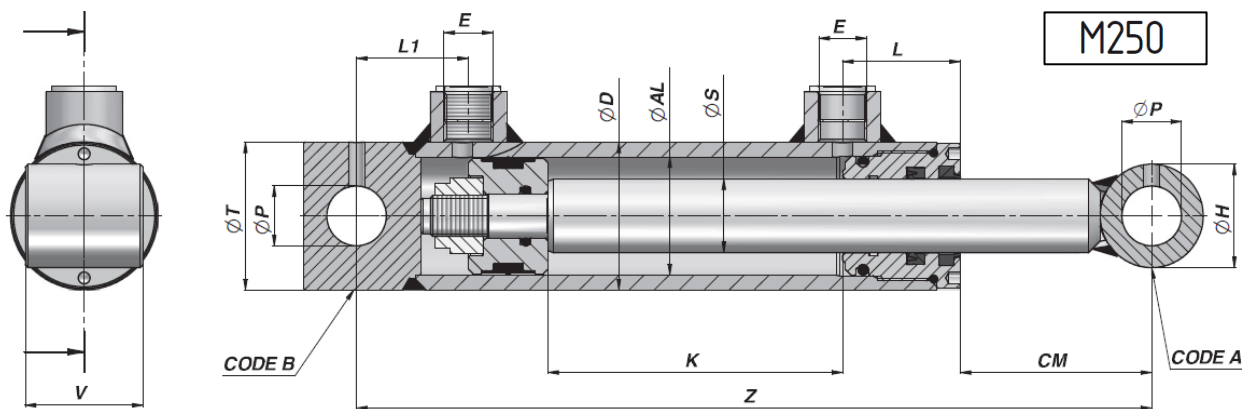

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	CM	ØP	ØH	V	ØT	Code A	Code B	Codice Code Bestell-Nr.	K	Z	kg
ØD 70 ØAL 60 ØS 35																	
HFR2S0600350200	200	400	7,50														
HFR2S0600350300	300	500	9,00														
HFR2S0600350400	400	600	10,60														
HFR2S0600350500	500	700	12,10														
HFR2S0600350600	600	800	13,70														
HFR2S0600350700	700	900	15,20														
HFR2S0600350800	800	1000	16,80														
HFR2S0600350900	900	1100	18,30														
HFR2S0600351000	1000	1200	19,90														