


## HFR2S cylinder Ø100/50

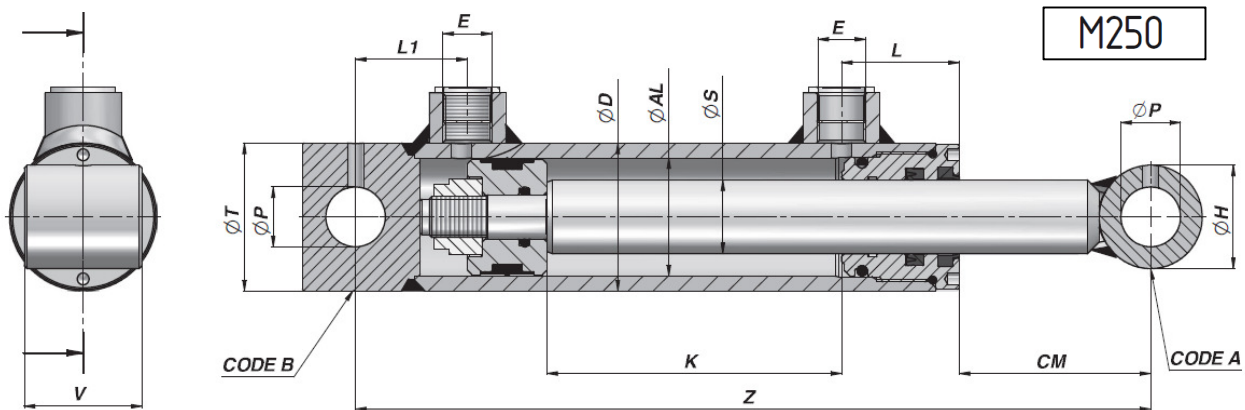

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045 with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



| Codice<br>Code<br>Bestell-Nr.     | K    | Z    | kg    | E<br>BSP | L  | L1 | CM | ØP    | ØH | V  | ØT  |
|-----------------------------------|------|------|-------|----------|----|----|----|-------|----|----|-----|
| <b>ØD 115    ØAL 100    ØS 50</b> |      |      |       |          |    |    |    |       |    |    |     |
| HFR2S1000500200                   | 200  | 425  | 21,50 |          |    |    |    |       |    |    |     |
| HFR2S1000500300                   | 300  | 525  | 25,00 |          |    |    |    |       |    |    |     |
| HFR2S1000500400                   | 400  | 625  | 28,50 |          |    |    |    |       |    |    |     |
| HFR2S1000500500                   | 500  | 725  | 32,00 | 1/2"     | 66 | 45 | 75 | 30,25 | 60 | 70 | 115 |
| HFR2S1000500700                   | 700  | 925  | 39,10 |          |    |    |    |       |    |    |     |
| HFR2S1000500900                   | 900  | 1125 | 46,10 |          |    |    |    |       |    |    |     |
| HFR2S1000501000                   | 1000 | 1225 | 49,60 |          |    |    |    |       |    |    |     |