


HM0 cylinder Ø32/20

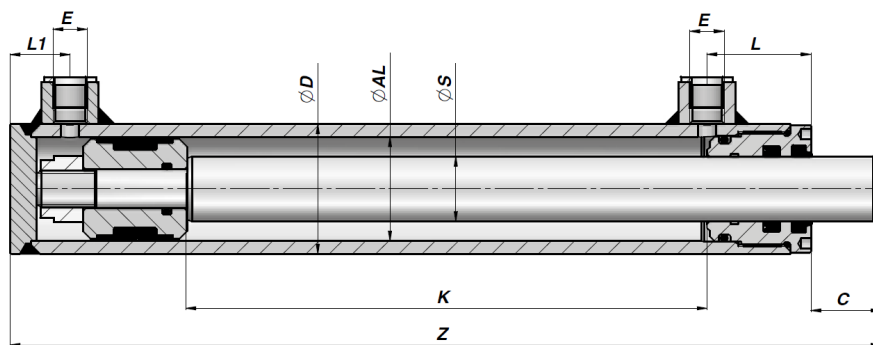

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25 °C - +80 °C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 42 ØAL 32 ØS 20							
HM0032200050	50	155	1,30	1/4"	33	20	16
HM0032200100	100	205	1,60				
HM0032200150	150	255	1,95				
HM0032200200	200	305	2,30				
HM0032200250	250	355	2,70				
HM0032200300	300	405	3,00				
HM0032200400	400	505	3,70				
HM0032200500	500	605	4,40				