


## HFRT plunger cylinder Ø30

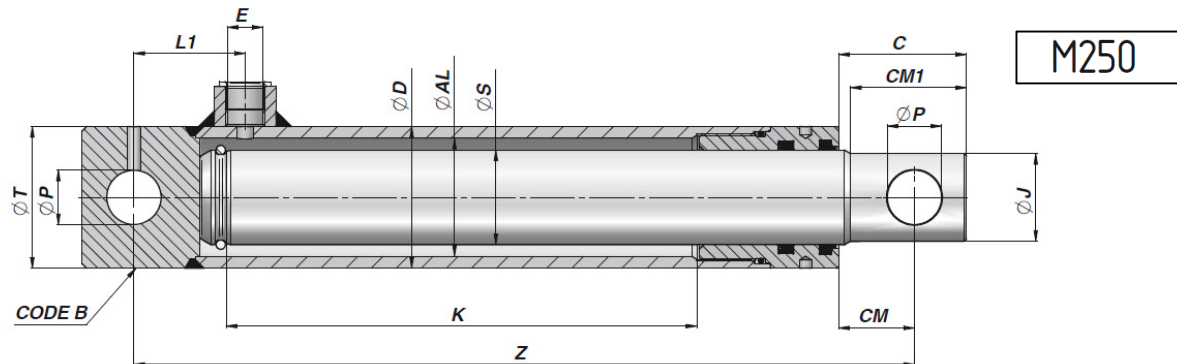

Enkeltvirkende / Singel acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 140 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



| Codice<br>Code<br>Bestell-Nr.   | K   | Z   | kg   | E<br>BSP | L1 | ØP | CM | C  | ØJ | CM1 | ØT |
|---------------------------------|-----|-----|------|----------|----|----|----|----|----|-----|----|
| <b>ØD 50    ØAL 40    ØS 30</b> |     |     |      |          |    |    |    |    |    |     |    |
| HFRT230200                      | 200 | 300 | 3,61 | 3/8"     | 42 | 16 | 26 | 42 | 27 | 37  | 50 |
| HFRT230250                      | 250 | 350 | 4,16 |          |    |    |    |    |    |     |    |
| HFRT230300                      | 300 | 400 | 4,72 |          |    |    |    |    |    |     |    |
| HFRT230350                      | 350 | 450 | 5,27 |          |    |    |    |    |    |     |    |
| HFRT230400                      | 400 | 500 | 5,82 |          |    |    |    |    |    |     |    |
| HFRT230550                      | 550 | 650 | 7,30 |          |    |    |    |    |    |     |    |