


HFRT plunger cylinder Ø40

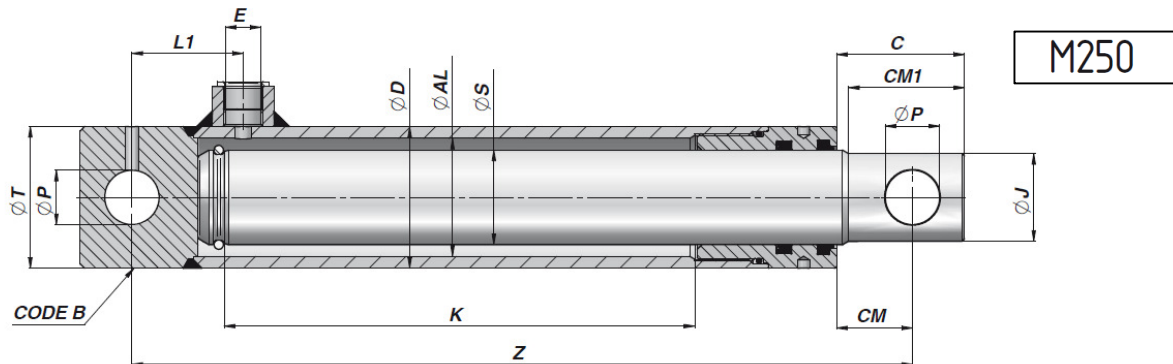

Enkeltvirkende / Singel acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 140 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L1	ØP	CM	C	ØJ	CM1	ØT
ØD 60 ØAL 50 ØS 40											
HFRT340200	200	330	6,00	3/8"	47	23	32	54	37	49	60
HFRT340250	250	380	6,84								
HFRT340300	300	430	7,67								
HFRT340350	350	480	8,49								
HFRT340400	400	530	9,32								
HFRT340550	550	680	11,70								
HFRT340700	700	830	14,10								