


HFRT plunger cylinder Ø50

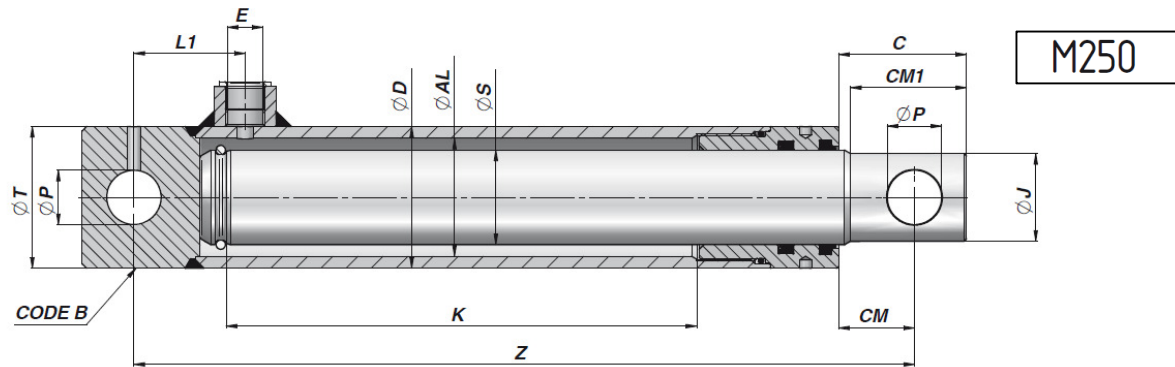

Enkeltvirkende / Singel acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 140 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L1	ØP	CM	C	ØJ	CM1	ØT
ØD 70 ØAL 60 ØS 50											
HFRT450300	300	460	11,80	3/8"	50	25,5	49	74	47	65	65
HFRT450400	400	560	14,00								
HFRT450550	550	710	17,50								
HFRT450700	700	860	21,00								