


Hydra-Comp

Hydraulikmotor MPM

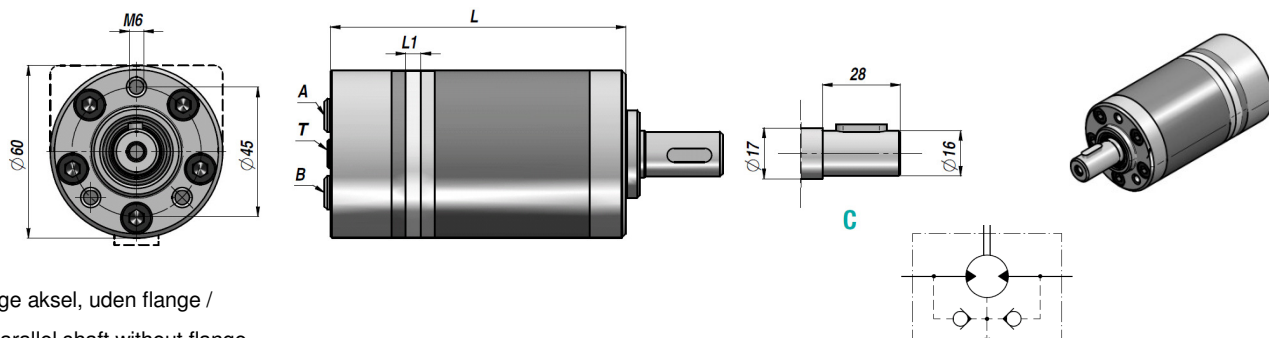

MPM

Motor Ø16 lige aksel, uden flange /

Motor Ø16 parallel shaft without flange

Standard: CONNESSIONI POSTERIORI - REAR PORTS - ANSCHLÜSSE HINTEN

VALVOLE UNIDIREZIONALI INCORPORATE

BUILT-IN CHECK VALVES

EINGEBAUTE RÜCKSCHLAGVENTILE

Codice Code Bestell-Nr.	Tipo Type Typ	cm³/giro cm³/rev cm³/U	n. Max giri/min rpm - U/Min.	M Max daNm	Q MAX l/min	P MAX bar			A - B	T	L	L1	kg
						Caduta Drop Gefälle Δp	Ingresso Inlet Eingang	Ritorno Return Rücklauf					
						LAVORO CONTINUO - CONTINUOUS WORK - DAUERARBEIT							
MPM008NC16	MPM 8 C	8,2	1950	1,1	16	105	140	140 *	3/8"	1/8"	104	3,5	1,90
MPM012NC16	MPM 12 C	12,9	1550	1,6	20	105	140	140 *			106	5,5	2,00
MPM020NC16	MPM 20 C	20,0	1000	2,5	20	105	140	140 *			109	8,5	2,10
MPM032NC16	MPM 32 C	31,8	630	4,0	20	105	140	140 *			114	13,5	2,20
MPM040NC16	MPM 40 C	40,0	500	4,1	20	82,5	140	140 *			117,5	17,0	2,30
MPM050NC16	MPM 50 C	50,0	400	4,5	20	70	140	140 *			121,5	21,0	2,50

* = CON DRENAGGIO - WITH DRAIN - MIT DRÄNLEITUNG

OPTION

P.../R
VMP SULLA LINEA "A"
RELIEF VALVE ON LINE "A"
DBV AUF LEITUNG "A"

P.../L
VMP SULLA LINEA "B"
RELIEF VALVE ON LINE "B"
DBV AUF LEITUNG "B"





.../D
VMP SULLE LINEE "A/B"
RELIEF VALVE ON LINES "A/B"
DBV AUF LEITUNGEN "A/B"

OPTION


OPTION

OPTION

PRESSIONE MAX. AL RITORNO SENZA DRENAGGIO MAX. RETURN PRESSURE WITHOUT DRAIN MAX GEGENDRUCK OHNE DRÄNLEITUNG

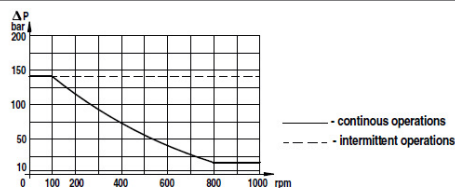



FLANGE KIT Code: MF48443014



CON N.3 VITI M6x14"
WITH No.3 SCREWS M6x14
MIT Nr.3 SCHRAUBEN M6x14

CARICHI AMMESSI SULL'ALBERO PERMISSIBLE SHAFT LOADS ZULÄSSIGE WELLENBELASTUNGEN

Albero-Shaft-Welle: "C-CK-SH"

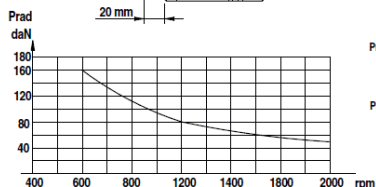

Prad = Carico radiale
Radial load
Radiale Belastung
Pa = Carico assiale
Axial load
Axiale Belastung

www.hydra-comp.com