


Hydra-Comp


Hydraulikmotor MCRN

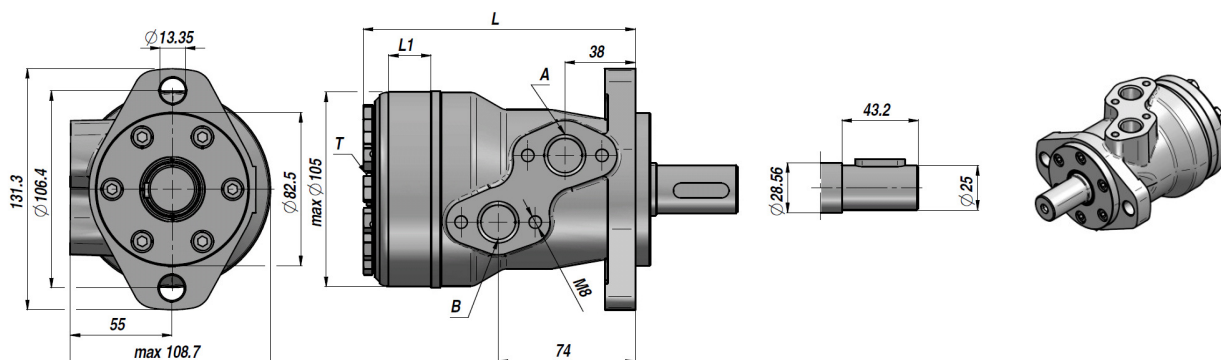

MCRN

Motor Ø25 lige aksel, SAE A-flange /

Motor Ø25 parallel shaft SAE A-flange



Standard: CON CUSCINETTI A RULLI PER CARICHI RADIALI - WITH NEEDLE BEARINGS FOR RADIAL LOADS - MIT ROLLENLAGERN FÜR RADIALE BELASTUNG

VALVOLE UNIDIREZIONALI INCORPORATE

BUILT-IN CHECK VALVES

EINGEBAUTE RÜCKSCHLAGVENTILE

Codice Code Bestell-Nr.	Tipo Type Typ	cm³/giro cm³/rev cm³/U	n. Max giri/min rpm - U/Min.	M Max daNm	Q MAX l/min	P MAX bar			A - B	T	L	L1	kg
						Caduta Drop Gefälle Δp	Ingresso Inlet Eingang	Ritorno Return Rücklauf					
						LAVORO CONTINUO - CONTINUOUS WORK - DAUERARBEIT							
MCRN050CDO	MC-RN 50 CD	51,3	755	10,0	40	140	175	150 *	1/2"	1/4"	140	10,0	6,70
MCRN080CDO	MC-RN 80 CD	80,6	750	19,0	60	175	175	150 *			146	16,0	6,90
MCRN100CDO	MC-RN 100 CD	100,8	600	24,0	60	175	175	150 *			150	20,0	6,90
MCRN125CDO	MC-RN 125 CD	124,9	475	29,2	60	175	175	150 *			155	25,0	7,20
MCRN160CDO	MC-RN 160 CD	157,2	375	36,3	60	165	175	150 *			161,5	31,5	7,50
MCRN200CDO	MC-RN 200 CD	199,2	300	35,8	60	130	175	150 *			170	40,0	8,00
MCRN250CDO	MC-RN 250 CD	252,0	240	35,2	60	110	175	150 *			180	50,0	8,50
MCRN315CDO	MC-RN 315 CD	314,5	190	36,0	60	85	175	150 *			192	62,0	9,00
MCRN400CDO	MC-RN 400 CD	370,0	160	42,0	60	85	175	150 *			204	74,0	9,30

PRESSIONE MAX. AL RITORNO SENZA DRENAGGIO
MAX. RETURN PRESSURE WITHOUT DRAIN
MAX GEGENDRUCK OHNE DRÄNLEITUNG

CARICHI AMMESSI SULL'ALBERO
PERMISSIBLE SHAFT LOADS
ZULÄSSIGE WELLENBELASTUNGEN

