


HM0 cylinder Ø25/16

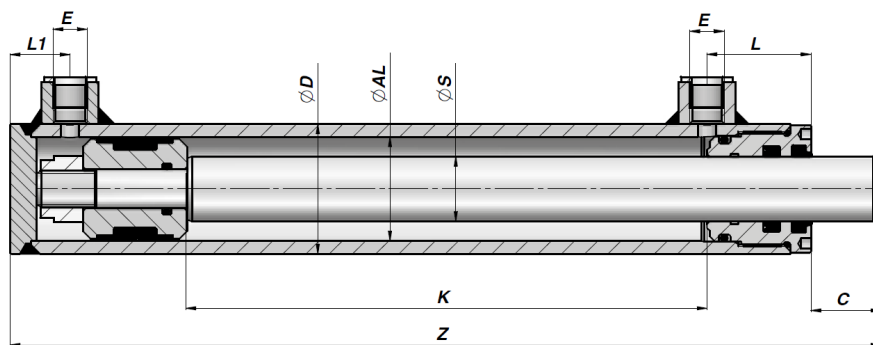

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 35 ØAL 25 ØS 16							
HM0025160050	50	135	0,70	1/4"	33	15	17
HM0025160100	100	185	0,95				
HM0025160150	150	235	1,25				
HM0025160200	200	285	1,50				