



Idraulikmotor MCPN

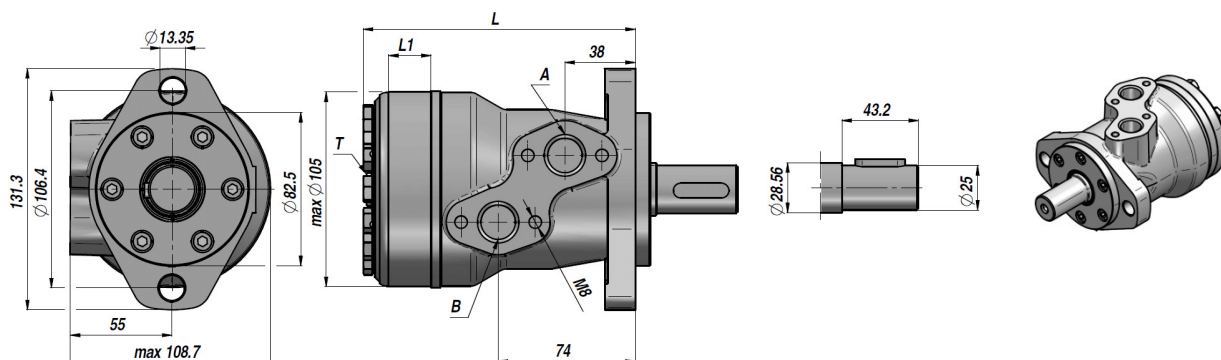

MCPN

Motor Ø25 lige aksel, SAE A-flange /


Motor Ø25 parallel shaft SAE A-flange



Standard: CON CUSCINETTI A RULLI PER CARICHI RADIALI - WITH NEEDLE BEARINGS FOR RADIAL LOADS - MIT ROLLENLAGERN FÜR RADIALE BELASTUNG														
Codice Code Bestell-Nr.	Tipo Type Typ	cm³/giro cm³/rev cm³/U	n. Max giri/min rpm - U/Min.	M Max daNm	Q MAX l/min	P MAX bar			A - B	T	L	L1	kg	
						Caduta Drop Gefälle Δp	Ingresso Inlet Eingang	Ritorno Return Rücklauf						
						LAVORO CONTINUO - CONTINUOUS WORK - DAUERARBEIT								
MCPN050CDO	MC-PN 50 CD	51,7	879	8,1	45	125	165	150 *			137	7,0	5,60	
MCPN080CDO	MC-PN 80 CD	77,7	740	12,9	60	125	165	150 *			140,5	10,5	5,70	
MCPN100CDO	MC-PN 100 CD	96,2	589	16,1	60	125	165	150 *			143	13,0	5,90	
MCPN125CDO	MC-PN 125 CD	117,9	475	20,2	60	125	165	150 *			146	16,0	6,00	
MCPN160CDO	MC-PN 160 CD	155,5	370	24,5	60	125	165	150 *	1/2"	1/4"	151	21,0	6,20	
MCPN200CDO	MC-PN 200 CD	189,9	296	28,6	60	110	165	150 *			157	26,0	6,40	
MCPN250CDO	MC-PN 250 CD	231,0	237	36,0	60	110	165	150 *			162	32,0	6,60	
MCPN315CDO	MC-PN 315 CD	311,7	189	40,6	60	90	165	150 *			172	42,0	6,90	
MCPN400CDO	MC-PN 400 CD	386,2	149	43,5	60	70	165	150 *			182	52,0	7,40	
* = CON DRENAGGIO - WITH DRAIN - MIT DRÄNLEITUNG														

* = CON DRENAGGIO - WITH DRAIN - MIT DRÄNLEITUNG

PRESSIONE MAX. AL RITORNO SENZA DRENAGGIO MAX. RETURN PRESSURE WITHOUT DRAIN MAX GEGENDRUCK OHNE DRÄNLEITUNG

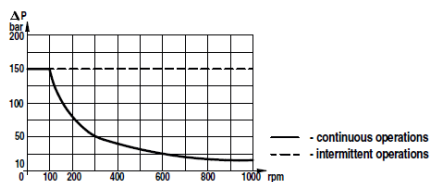

CARICHI AMMESSI SULL'ALBERO PERMISSIBLE SHAFT LOADS ZULÄSSIGE WELLENBELASTUNGEN

