


HM0 cylinder Ø40/20

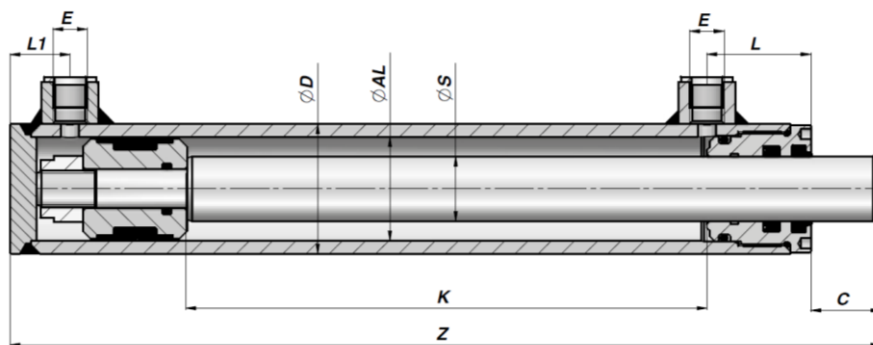

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s

Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 50 ØAL 40 ØS 20							
HM01200100	100	230	2,27	1/4"	40	23	22
HM01200150	150	280	2,67				
HM01200200	200	330	3,05				
HM01200250	250	380	3,45				
HM01200300	300	430	3,85				
HM01200350	350	480	4,27				
HM01200400	400	530	4,65				
HM01200450	450	580	5,08				
HM01200500	500	630	5,49				