


HM0 cylinder Ø40/25

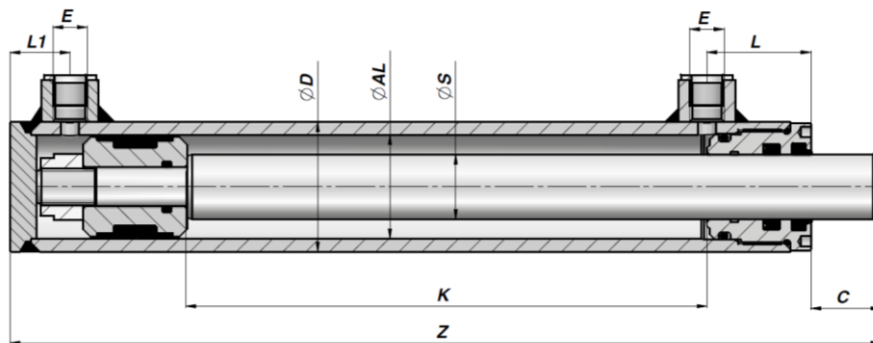

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 50 ØAL 40 ØS 25							
HM01250100	100	230	2,50	1/4"	40	23	22
HM01250150	150	280	2,95				
HM01250200	200	330	3,39				
HM01250250	250	380	3,85				
HM01250300	300	430	4,32				
HM01250350	350	480	4,79				
HM01250400	400	530	5,26				
HM01250450	450	580	5,72				
HM01250500	500	630	6,20				
HM01250550	550	680	6,60				
HM01250600	600	730	7,13				