


HM0 cylinder Ø50/25

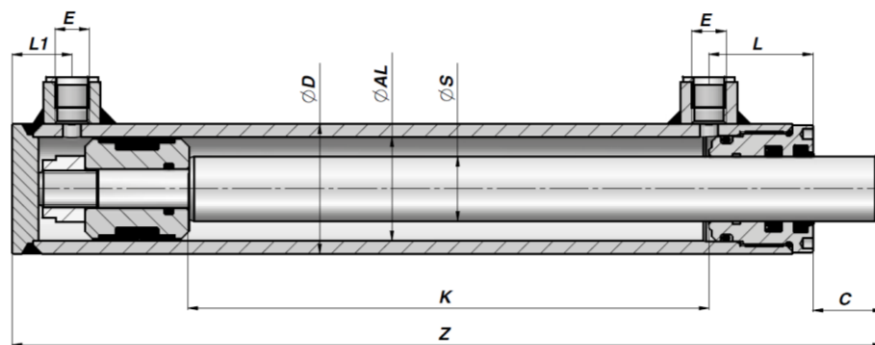

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045 with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 60 ØAL 50 ØS 25							
HM02250100	100	240	3,29	3/8"	43	26	22
HM02250150	150	290	3,83				
HM02250200	200	340	4,34				
HM02250250	250	390	4,85				
HM02250300	300	440	5,35				
HM02250350	350	490	5,94				
HM02250400	400	540	6,40				
HM02250450	450	590	7,30				
HM02250500	500	640	7,43				
HM02250550	550	690	8,06				
HM02250600	600	740	8,46				
HM02250800	800	940	10,71				
HM02251000	1000	1140	12,87				