


Hydra-Comp

HM0 cylinder Ø60/30

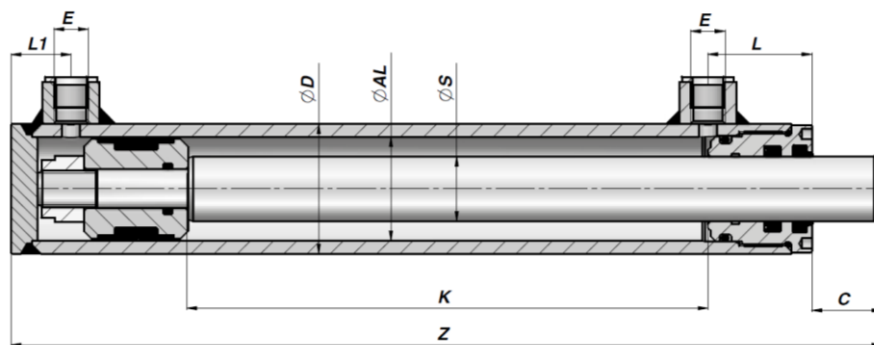

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 70 ØAL 60 ØS 30							
HM03300100	100	260	4,82	3/8"	50	30	23
HM03300150	150	310	5,55				
HM03300200	200	360	6,20				
HM03300250	250	410	6,87				
HM03300300	300	460	7,55				
HM03300350	350	510	8,20				
HM03300400	400	560	8,90				
HM03300450	450	610	9,53				
HM03300500	500	660	10,25				
HM03300550	550	710	10,86				
HM03300600	600	760	11,60				
HM03300800	800	960	14,26				
HM03301000	1000	1160	17,00				

www.hydra-comp.com