


HM0 cylinder Ø60/35

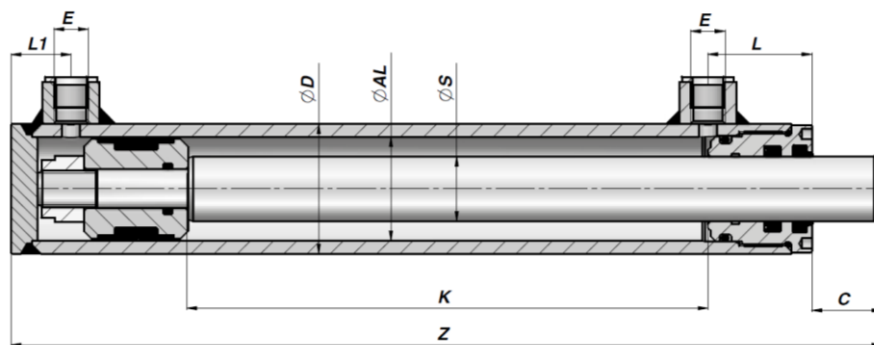

M250

Dobbeltvirkende / Double acting

Max hastighed / Max speed: 0,5m/s


Arbejdstryk / Work pressure: 200 Bar

Spidstryk / Peak pressure: 250Bar

Temperatur / Temperature: -25°C - +80°C

Stempelstang / Piston rod: UNI C45 steel SAE 1045with 25µ +/-5 hard chrome

Rør / Tube: st 52-3 DIN 2393 ISO H9



Codice Code Bestell-Nr.	K	Z	kg	E BSP	L	L1	C
ØD 70 ØAL 60 ØS 35							
HM03350100	100	260	5,07	3/8"	50	30	23
HM03350150	150	310	5,85				
HM03350200	200	360	6,60				
HM03350250	250	410	7,40				
HM03350300	300	460	8,15				
HM03350350	350	510	8,94				
HM03350400	400	560	9,72				
HM03350450	450	610	10,47				
HM03350500	500	660	11,25				
HM03350550	550	710	12,00				
HM03350600	600	760	12,81				
HM03350800	800	960	15,87				
HM03351000	1000	1160	18,93				